

EFOAM

DRY FOAMER EXTRACTOR



EFOAM

DRY FOAMER EXTRACTOR

PRINCIPALI APPLICAZIONI


Cleaning companies, car wash, food industries, public restrooms, hotels, conference room, restaurants, pubs, offices, banks, shops, rental centers, trains, bus, airplanes and airports, cinemas, theatres, ferries, boats, schools, universities, trade centers.

SURFACES

moquettes, carpets, couches, mattresses, textile surfaces, inox surfaces...

REQUIRED LIQUIDS

Water - Diluted foam solution.

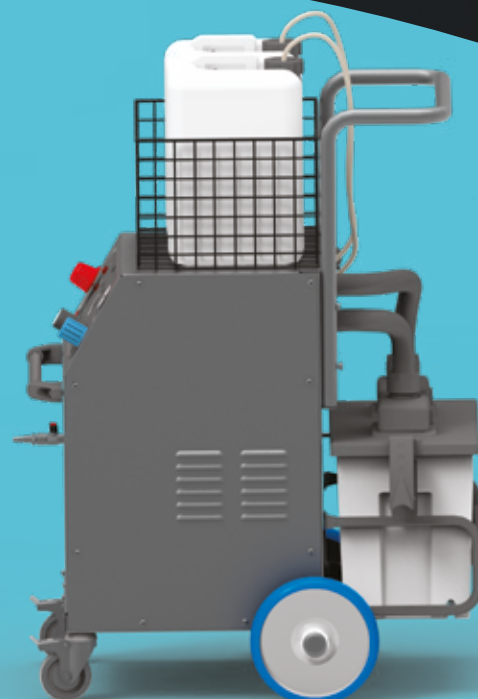

TECHNICAL FEATURES EFOAM

VOLTAGE	220-240V ~ 50 Hz
MAX POWER	1900W
COMPRESSED AIR	450 W - 5Lt - 8bar
VACUUM	1380 W - 230 mBar
FOAM VIBRATION PUMP WITH AUTOMATIC STOP	55 W - 0,2 lt/min
FOAM SOLUTION TANK	12 Lt
RECOVERY TANK	13 Lt
ANTIFOAM TANK	2 lt
FOAM REGULATION (DRY-WET)	TAP
AIRPRESSURE REGULATION	TAP
ANTIFOAM DEVICE	SELF-CLOSING ELECTROVALVE
SIZE	700 x 420 x H 1050 mm
WEIGHT Kg	50 Kg

